




# R-2004

Specific

## **Wooden frame construction and non-residential and non-civil building**

### **Technical advantages**

- An 80-mm back width ensures a high degree of stability.
- The frame can be fixed directly to the inner leaf without using BAT anchors.
- A profile with a visible frame width of 18 to 25 mm, while the 0.8-mm black co-extrusion layer ensures a fine shadow line.
- Standard suitable for cavity widths of 40 mm
- To 100 mm with an auxiliary profile.
- Available as a complete product and in trade lengths.
- Suitable for nailing, screwing and sawing.
- Exceedingly strong corner joints because these are welded and milled for custom-made goods. This ensures the perfect drainage of water from the cavity.
- Suitable for pouring along in prefab concrete elements..

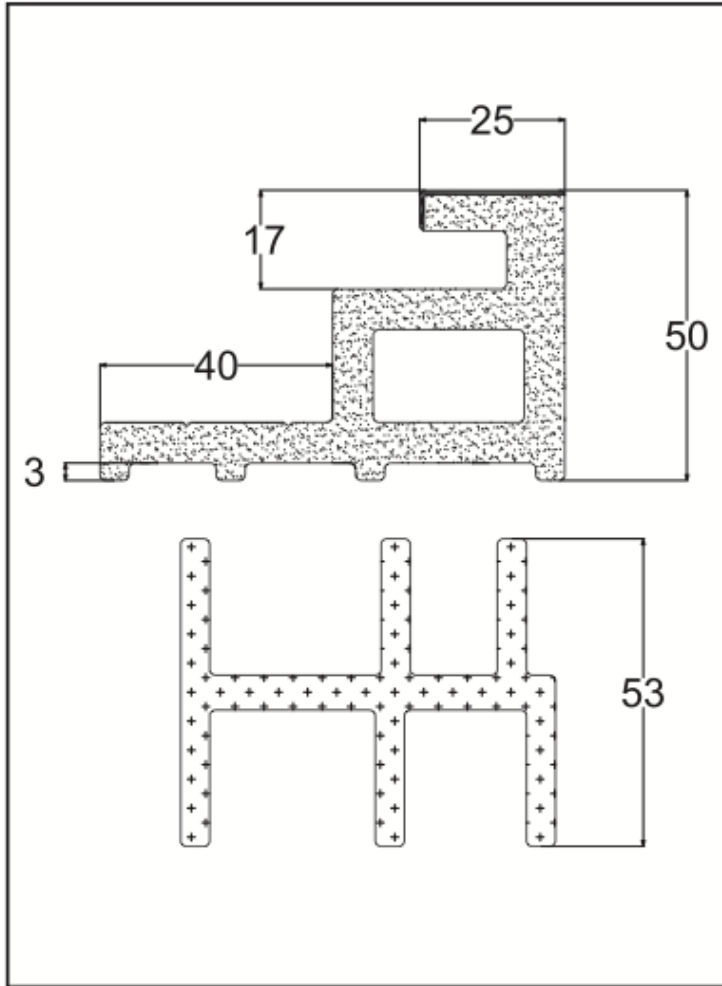

**RECYSTEL**

**Recystel**

De Compagnie 7

1689 AG Zwaag – The Netherlands

Postbus 4065

1620 HB Hoorn – The Netherlands

T: +31(0)229 - 265 170

F: +31(0)229 - 265 872

E: [info@recystel.nl](mailto:info@recystel.nl)

[www.recystel.nl](http://www.recystel.nl)